gardens at night
landscape lighting

INSTALLATION INSTRUCTIONS

INSTALLATION INSTRUCTIONS

Inground 50

IG50-XXX

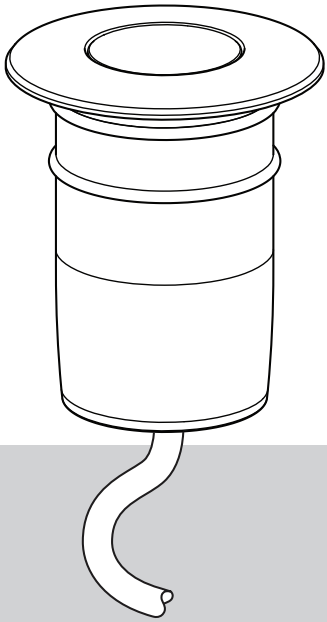

For digital Instructions & Warranty
gan.com.au

Note

1. Gardens at Night fittings should only be connected to approved Gardens at Night 24VDC Constant Voltage (CV) Power Supplies. FAILURE TO DO SO WILL VOID WARRANTY.
2. Gardens at Night fittings must be wired in parallel and connected in accordance with installation instructions provided (including soldering of cable joins and sealing using Adhesive Lined End Caps or Tubes). FAILURE TO DO SO WILL VOID WARRANTY.
3. Fittings are polarity sensitive and need to be connected positive (+) fitting lead to positive (+) incoming and exiting feed cables and negative (-) fitting lead to negative (-) incoming and exiting feed cables.
4. Do not carry fittings by lead as it may cause damage.
5. Do not connect fittings to constant current (CC) power supplies or AC transformers as this will cause permanent fitting failure and VOID WARRANTY.

2026/10

INSTALLATION - CONCRETE - CONDUIT OPTIONS

BEST PRACTICE FOR CONDUIT INSTALLATION: USE IG50-15M TO BRING ALL CONNECTIONS FOR JOINING ABOVE GROUND, AWAY FROM MOISTURE BUILD UP, OR POOLING WATER

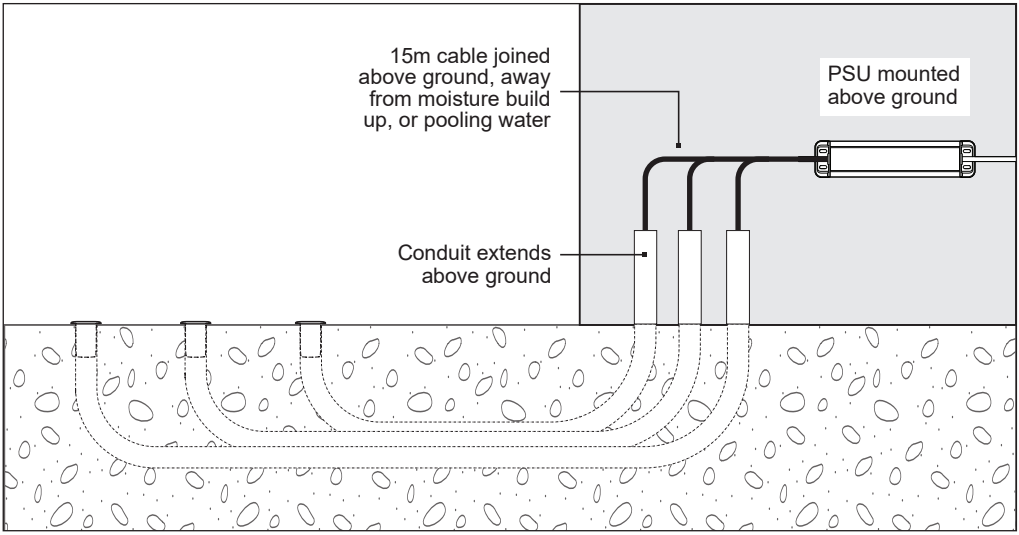

INSTALLATION - CONCRETE - CANISTER/CONDUIT

CANISTER/CONDUIT INSTALLATION

USE GANAN-IC-40X200 CANISTER ACCESSORY (NOT SUPPLIED)
OR Ø40mm GREY ELECTRICAL CONDUIT (NOT SUPPLIED)

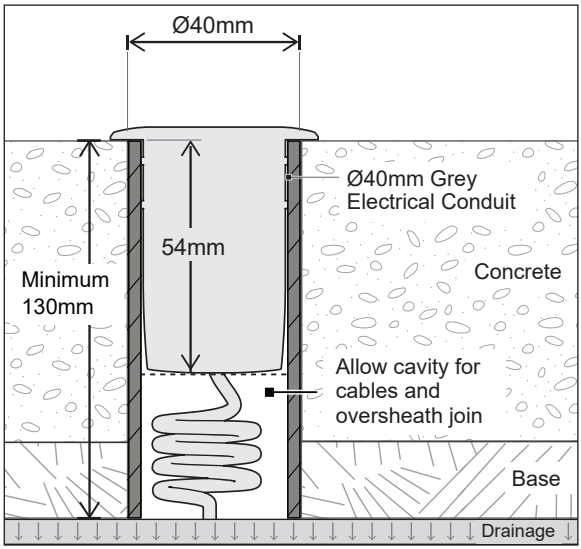

Gardens at Night Installation Canister GANAN-IC-40X200 is manufactured for precise fit and ease of installation. Standard Ø40mm Grey Electrical Conduits are also compatible but many vary with internal wall thickness and may affect product fit. Mounting Collar not required for canister or conduit installations.

Canister or conduits should be a minimum 130mm long, to provide the required allowance for coiled fitting cables, looped in and out feed cables, and oversheath joins. To prevent damage to O-rings when inserting the fitting, conduit inner edges may need to be smoothed or filed.

Drainage to sub-soil must be provided to not void warranty.

INSTALLATION - CONCRETE - CORED HOLE OPTION

CORED HOLE INSTALLATION

USE MOUNTING COLLAR (SUPPLIED)

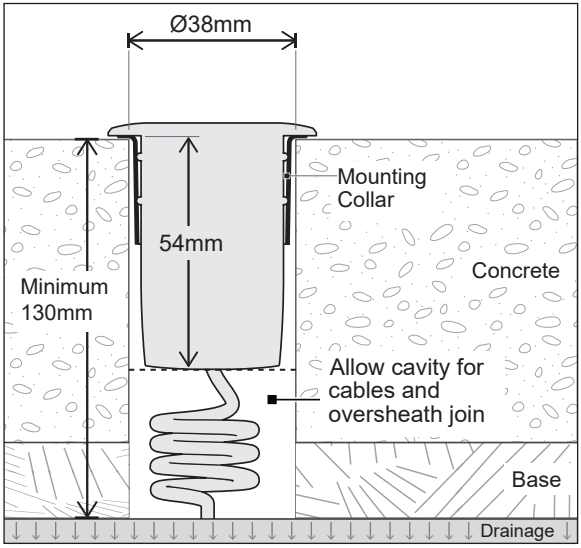

Fitting is supplied with a Mounting Collar to suit a Ø38mm cored hole.

Cored hole should penetrate the sub soil to allow drainage. Allow room for coiled fitting cables, looped in and out feed cables, and oversheath joins.

Securely attach Mounting Collar using appropriate adhesive for substrate material and construction. (Refer to 'Mounting Collar Installation Instructions' on p.4).

Drainage to sub-soil must be provided to not void warranty.

INSTALLATION - DECKING

USE MOUNTING COLLAR (SUPPLIED)

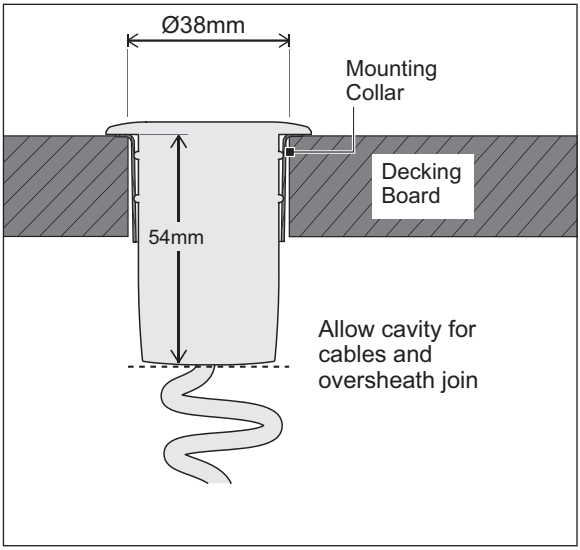

Ø38mm cutout is required for installation into decking. Use Mounting Collar supplied.

Securely attach Mounting Collar using appropriate adhesive for substrate material and construction. (Refer to 'Mounting Collar Installation Instructions' on p.4).

Ensure there is sufficient cavity to allow for coiled fitting cables, looped in and out feed cables, and oversheath joins.

FITTING KIT – PARTS SUMMARY

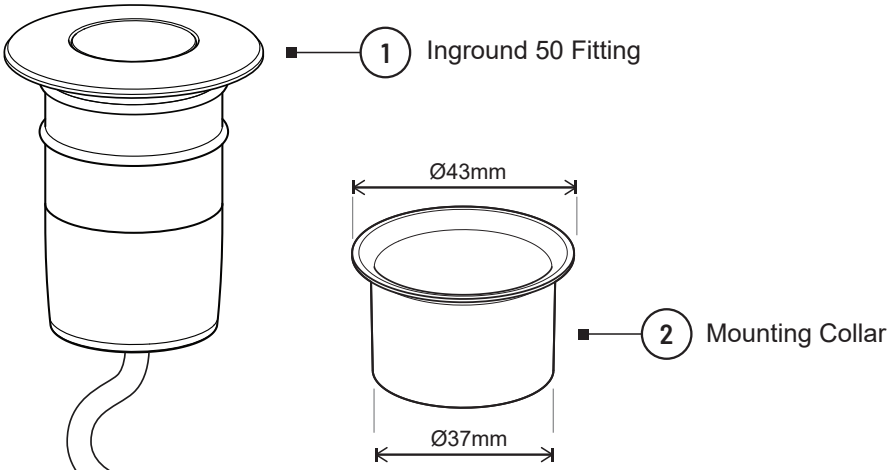

MOUNTING COLLAR INSTALLATION INSTRUCTIONS

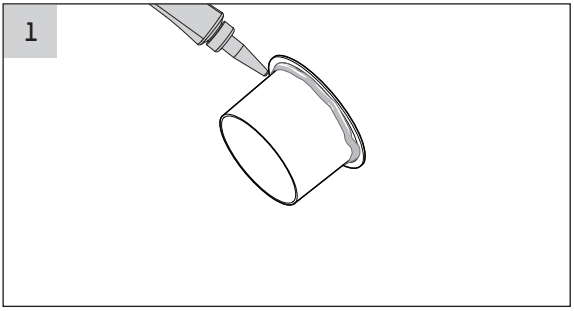

- Apply appropriate adhesive on the underside corner/lip of the Collar.

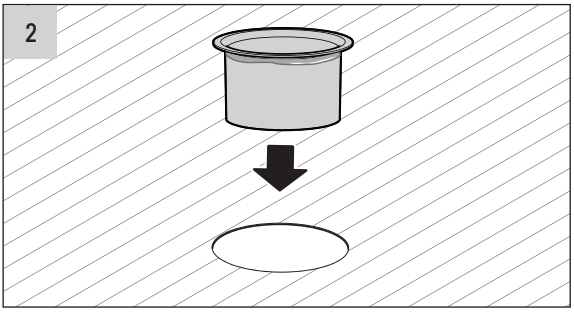

- Insert Mounting Collar into hole.
- Ensure excess adhesive is cleaned.
- Apply pressure on Mounting Collar until adhesive is fully cured.

FITTING INSTALLATION INSTRUCTIONS – CONNECTION

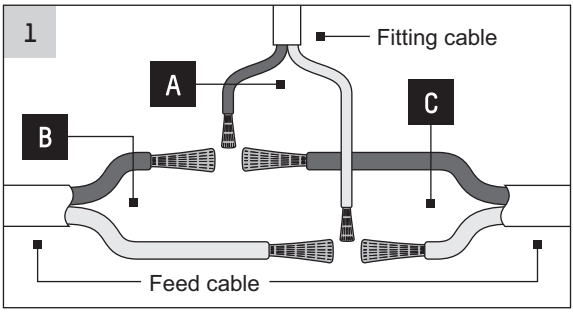

- Cut and remove two solid tinned ends from Fitting cable.
- Strip inner insulation from Fitting cable to expose strands (A).
- Cut incoming Feed cable from power supply (B).
- Strip inner insulation to expose copper strands from incoming Feed cable (B) and exiting cable (C).

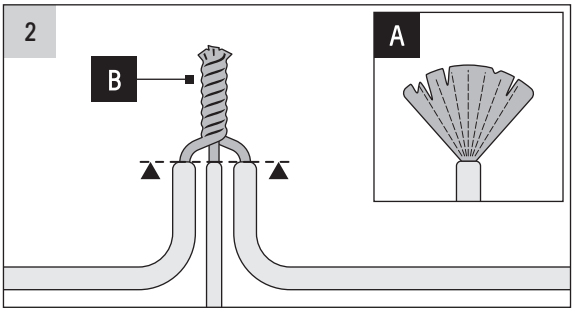

- Fan out all exposed copper strands (A).
- Tightly twist red fitting, feed and exiting cable (B), ensuring shoulders of inner insulation remain aligned.
- Repeat for black cables.

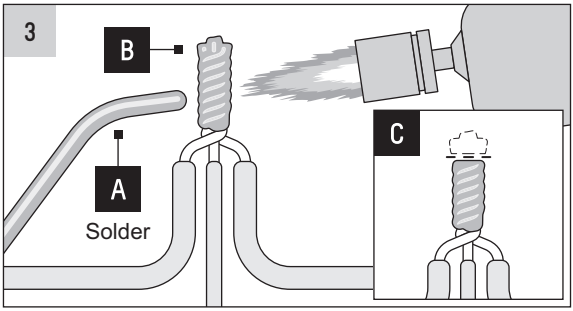

- Heat twisted copper with Butane Gas Torch* and apply solder (A).
- Solder should fully penetrate all strands (B).
- Trim solder with side cutters and carefully remove any sharp edges (C).
- Repeat for other cable join.

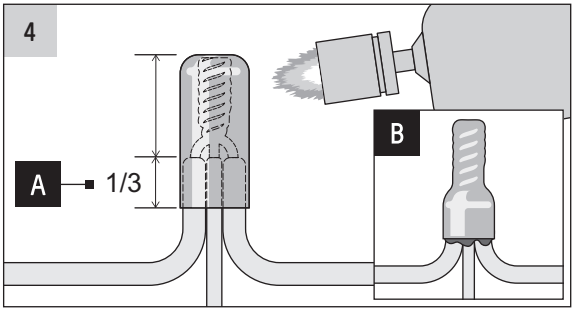

- Place Adhesive Lined End Cap** over soldered join.
- Ensure 1/3 (minimum) of cap length overlaps inner insulation (A).
- Apply heat gently to End Cap. Cap will collapse and encapsulate the join (B). Adhesive should be visible from the base of the cap.
- Repeat for other cable join.

* Butane Gas Torch and solder available from Gardens at Night.

OVERSHEATH JOINING METHOD

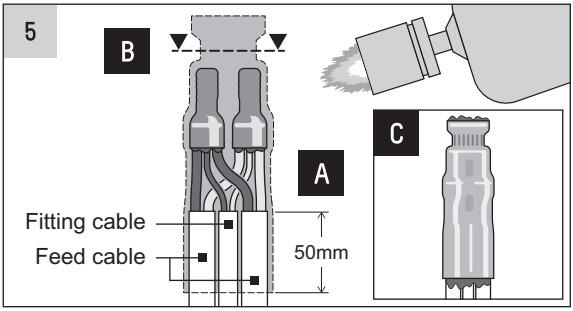

To oversheath cable joins:

- Place adhesive lined heat shrink tubing or oversized Adhesive Lined End Cap** over red and black cable joins.
- Ensure tube or cap covers outer insulation of cables by 50mm (A).
- Apply heat gently. If using tubing, firmly pinch top of tube with pliers to seal (B).
- Oversheath will collapse and encapsulate the joins. Adhesive should be visible from ends of oversheath (C).

* Butane Gas Torch and solder available from Gardens at Night.
** Adhesive Lined End Caps are available in various sizes to suit different low voltage cable sizes. Caps should be at least 1/3 larger than join and are available from Gardens at Night.

FITTING INSTALLATION CONTINUED

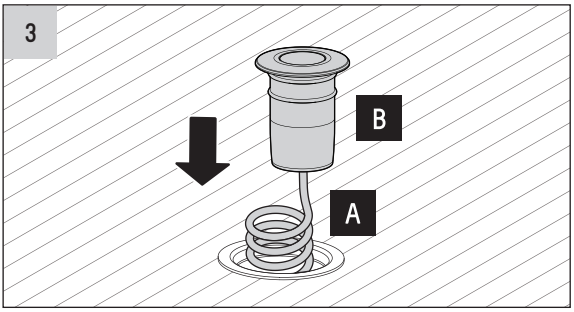

Install Inground fitting:

- Coil cable neatly into cavity or conduit (A).
- Insert fitting into cavity or Canister/ conduit (B).

Drainage to sub-soil must be provided to not void warranty.

INSTALLATION ACCESSORIES

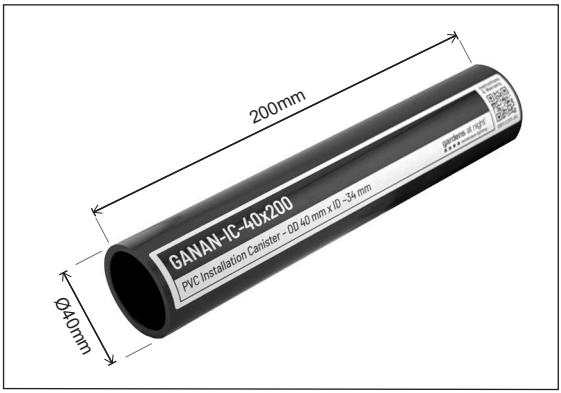

Optional installation accessory:

- The Gardens at Night Installation Canister (GANAN-IC-40x200) provides a precise fit and efficient installation solution for concrete and masonry applications. Sold separately.

Installation Canisters

RELATED VIDEOS

- To prevent moisture ingress and comply with warranty, refer to the included instructions.
- For additional reference, watch the Standard & Oversheath Joining Methods video here.

Joining Methods Video

SCAN QR CODE FOR PRODUCT INFORMATION

Inground Lights Product Page

Digital Instructions & Warranty

WARRANTY STATEMENT

SERRATA GROUP PTY LTD - ABN 35 131 274 176
Gardens at Night™ is a business of Serrata Group.

Serrata Group Pty Ltd warrants that, subject to the exclusions and limitations below, all Gardens at Night products will be free from defects in materials and workmanship for a minimum period of 12 months from the date of purchase or as stated on the Product Information sheet.

If a defect appears in a Product before the end of the Warranty Period, and Serrata Group Pty Ltd finds the Product to be defective in materials or workmanship, Serrata Group Pty Ltd will, in its sole discretion, either:

(a) repair the Product or the defective part of the Product free of charge; or

(b) cause the Product or the defective part of the Product to be repaired by a qualified repairer free of charge; or

(c) replace the Product.

Serrata Group Pty Ltd reserves the right to replace defective parts of the Products with parts and components of similar quality, grade and composition where an identical part or component is not available. Products presented for repair may be replaced by refurbished Product parts of the same type rather than being repaired. Refurbished parts may be used to repair the Products.

WARRANTY CLAIMS

1. If a fault covered by this warranty occurs, the customer must first contact Serrata Group Pty Ltd on the contact details below, or the trader from whom the Product was purchased.
2. Any warranty claim must be accompanied by:
   (a) proof of purchase;
   (b) full details of the alleged defect; and
   (c) any other appropriate documentation.
3. The customer must make the Product available to Serrata Group Pty Ltd or its authorised repair agent for inspection and testing. If such inspection and testing finds no defect in the Product, the customer must pay Serrata Group Pty Ltd's usual costs of service work and testing.
4. The customer must bear the cost of the transport of the Product to and from Serrata Group Pty Ltd or its authorised repair agent, and all insurance of the Product.

EXCLUSIONS

This warranty will not apply where:

(a) the Product has been repaired, altered or modified by someone other than Serrata Group Pty Ltd or its authorised agent;

(b) the alleged defect in the Product is within acceptable industry variances;

(c) Serrata Group Pty Ltd cannot establish any fault in the Product after testing and inspection;

(d) the Product has been used other than for the purpose for which it was designed and manufactured;

(e) the defect in the Product has arisen due to the customer's failure to properly install, use, service or maintain the Product in accordance with any instructions or user manuals that are supplied with the Product;

(f) the Product has been subject to abnormal conditions, including environment, temperature, water, fire, humidity or similar;

(g) the defect has arisen due to abuse, misuse, neglect or accident

(h) the damage occurred in transit;

(i) the damage is due to power surges.

The warranty does not extend to:

(a) damage or defects caused by normal wear and tear; or

(b) natural material finish and aging, including but not limited to oxidation, patina, fading or surface rust.

LIMITATIONS

Serrata Group Pty Ltd makes no express warranties or representations other than set out in this warranty.

Except to the extent required by the Australian Consumer Law, the repair of the Product or part of the Product is the absolute limit of Serrata Group Pty Ltd's liability under this express warranty.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Serrata Group Pty Ltd provides the warranty in relation to any Gardens at Night branded exterior and landscape lighting Product.

The benefits of this warranty are in addition to any rights and remedies imposed by Australian State and Federal legislation that cannot be excluded. Nothing in this warranty is to be interpreted as excluding, restricting or modifying any State or Federal legislation applicable to the supply of goods and services which cannot be excluded, restricted or modified.

gardens at night™
landscape lighting

For information on Gardens at Night products, local distributor, showroom and contact information visit our website.

gan.com.au